

CE208-Database Management Systems

CE208-Database Management Systems

Week-1 (Intro)

Spring Semester, 2021-2022

Instructor: Yıldıran Yılmaz

Email: yildiran.yilmaz@erdogan.edu.tr

Office Hours: Thursday

Download [PDF-MS](#), [PDF-MD](#), [DOCX-MD](#), [PPTX-MD](#), [PPTX-MS](#)



Outline

- What is Database?
- Database Examples
- Database
- What is Database Management System?
- Classification of Database Management Systems

Outline

- Hierarchical databases
 - Network databases
 - Relational databases
 - Object Oriented databases
- Why use a database?
- Advantages of the Database Approach
- Database Management Systems

Outline

- Database Structure
- Table
- Data Types
 - MYSQL Data Types
- Key
- Primary key
- Foreign key
- Database Design

What is Database?

- It is an information repository where data that is related to each other is kept.
- The collection of data arranged in accordance with the purpose of use
- They are information stores with their logical and physical definitions.

Database Examples

- University - Student Affairs Information System
- Hospital - Patient, doctor, treatment, equipment, financial information
- A commercial company - Customer, Product, Sales, Payment, Delivery information
- Bank - Customer, deposit, credit card, credit information

Database

- The database concept was first introduced in the 1980s.
- It is used in everywhere from a simple web application up to large and complex data of international organizations
- Database applications are needed in many areas.

What is Database Management System?

It is a software system in which various complex following operations are performed.


- Creating a new database,
- Editing the database
- To use,
- Develop
- to take care of (maintanance)

Classification of Database Management Systems

- By Data Model
 - Hierarchical
 - Network
 - relational
 - Object Oriented
- By Number of Users
 - single user
 - multi-user


Hierarchical databases

- It is the first model used for databases.
- Hierarchical databases store information in a tree structure.

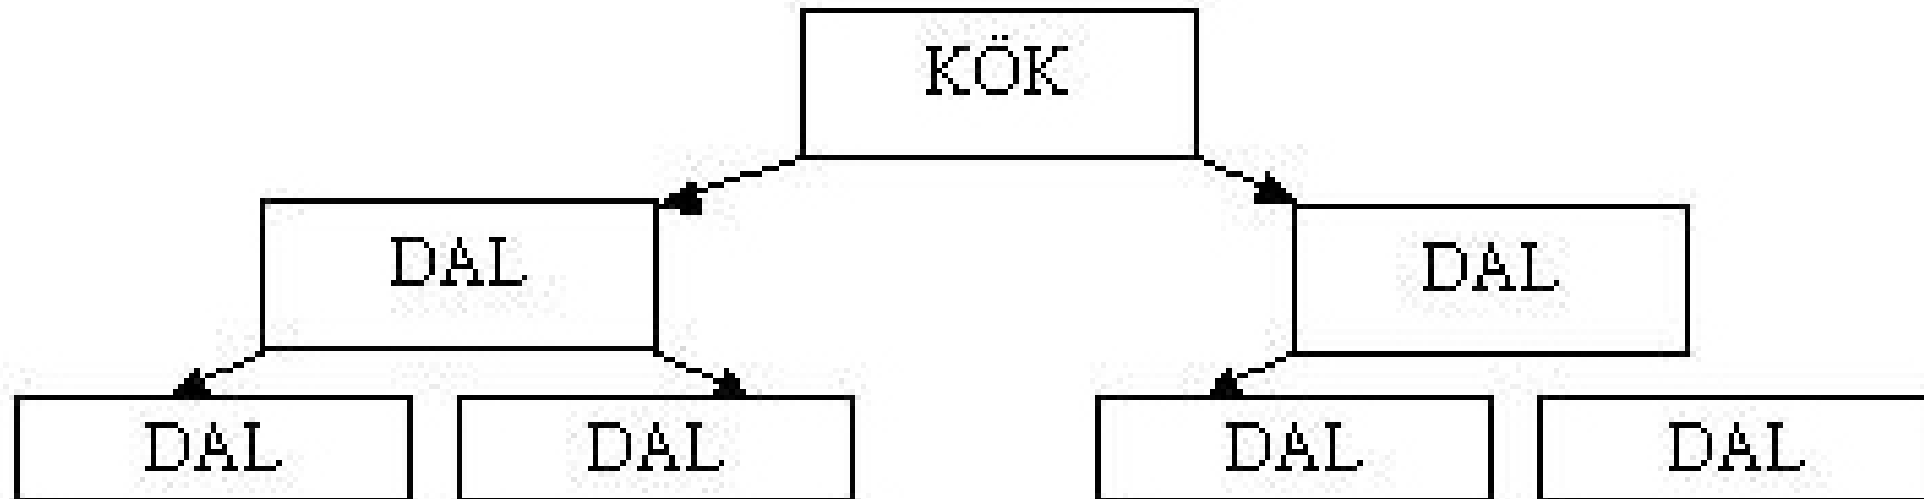

Network databases


- When hierarchical databases were insufficient, a structure in which data was stored in the form of graphs, which is a more advanced version of trees, emerged at the end of the 1960s.

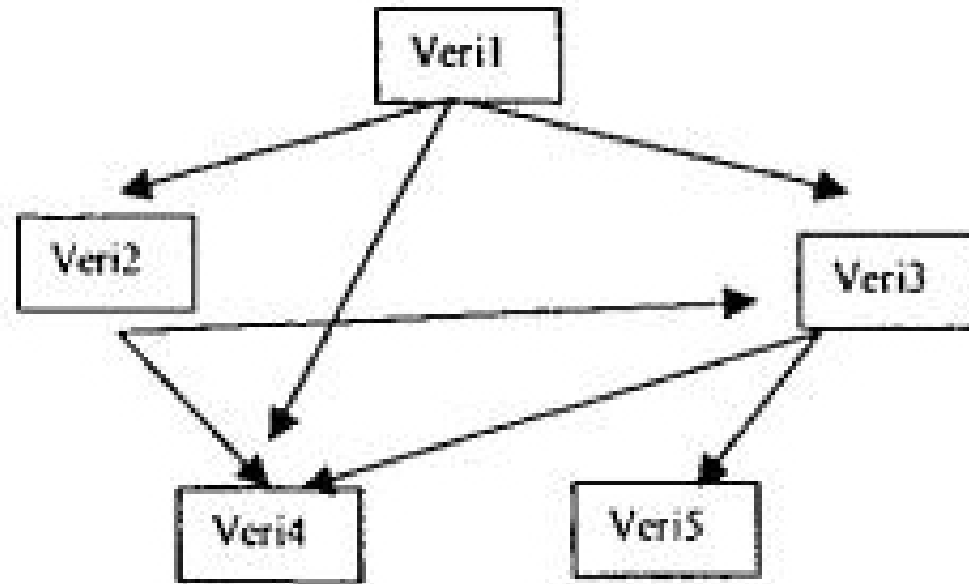

Relational databases

- It was developed in the early 1970s.
- In this system, data is stored in tabular form.
- Connections between tables are represented by mathematical relationships.
- Almost all database programs today have this structure.

Relational databases

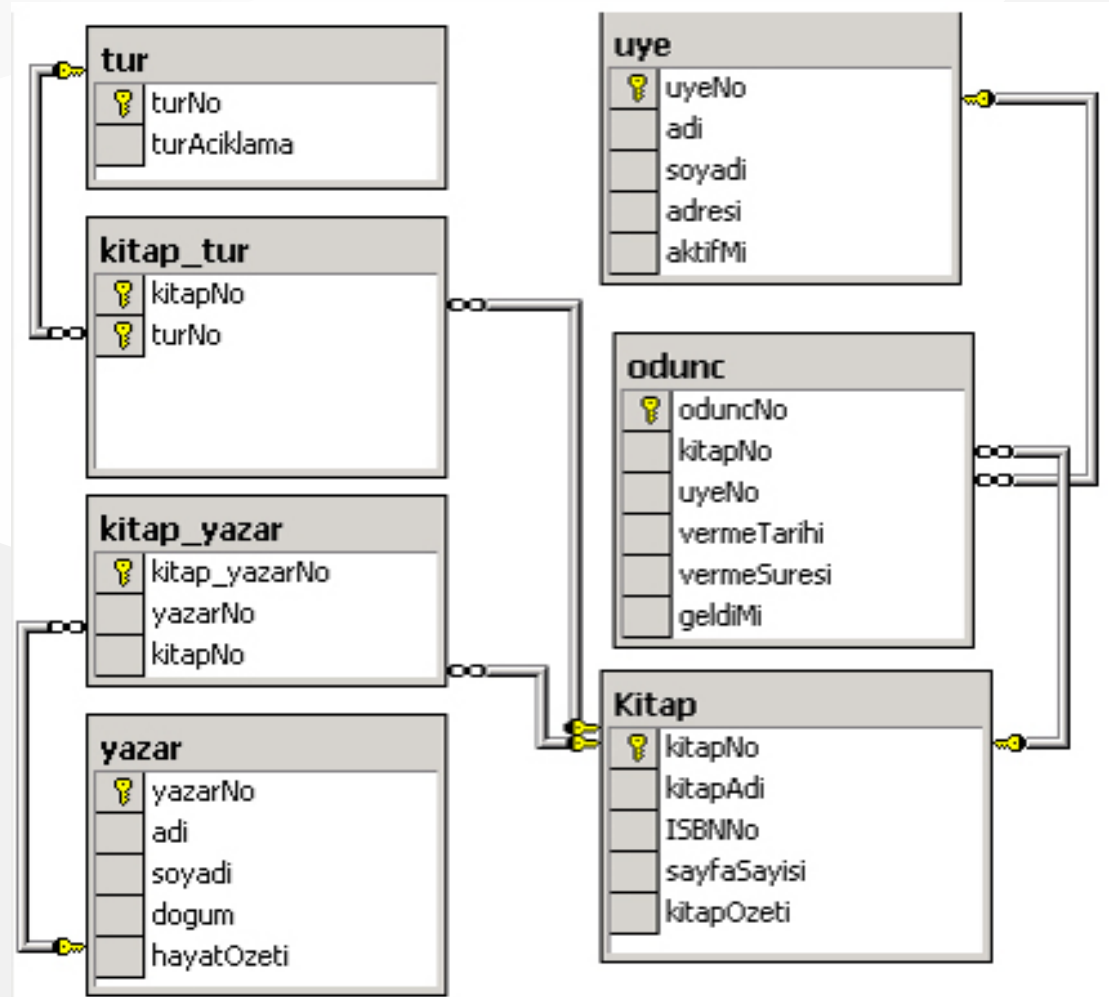

Object Oriented databases

- Objects used in many word processor and spreadsheet programs today are also used in databases.
- Object-oriented database means a database created and used in an object-oriented language such as
 - C++ ,
 - C# ,
 - java ,
 - Visual Basic .

Why use a database?

- The traditional approach to holding, storing and accessing data uses the approach of grouping data into separate files.
- With the increase in data and the need to access and edit data at the same time, the traditional approach has been inadequate.

Advantages of the Database Approach

- Preventing duplication of common data;
- Ensuring centralized control and consistency of data
- Ensuring data sharing
- Hiding physical structure and access method complexities from the user with multi-layered architectures,
- Presenting only the data that is of interest to each user in easy, understandable structures

Advantages of the Database Approach

- Ease of application software development with the analysis, design and development tools provided.
- Providing the necessary facilities for data integrity,
- Ensuring the desired level of security and confidentiality
- Solving operational problems such as backup, reboot, repair


Database Management Systems

- Oracle database
- IBM DB/2
- Adaptive Server Enterprise
- Informix
- Microsoft Access
- Microsoft SQL Server
- Microsoft Visual FoxPro
- MySQL

Database Management Systems

- PostgreSQL
- Progress
- SQLite
- Teradata
- CSQL
- OpenLink Virtuoso

Database Structure

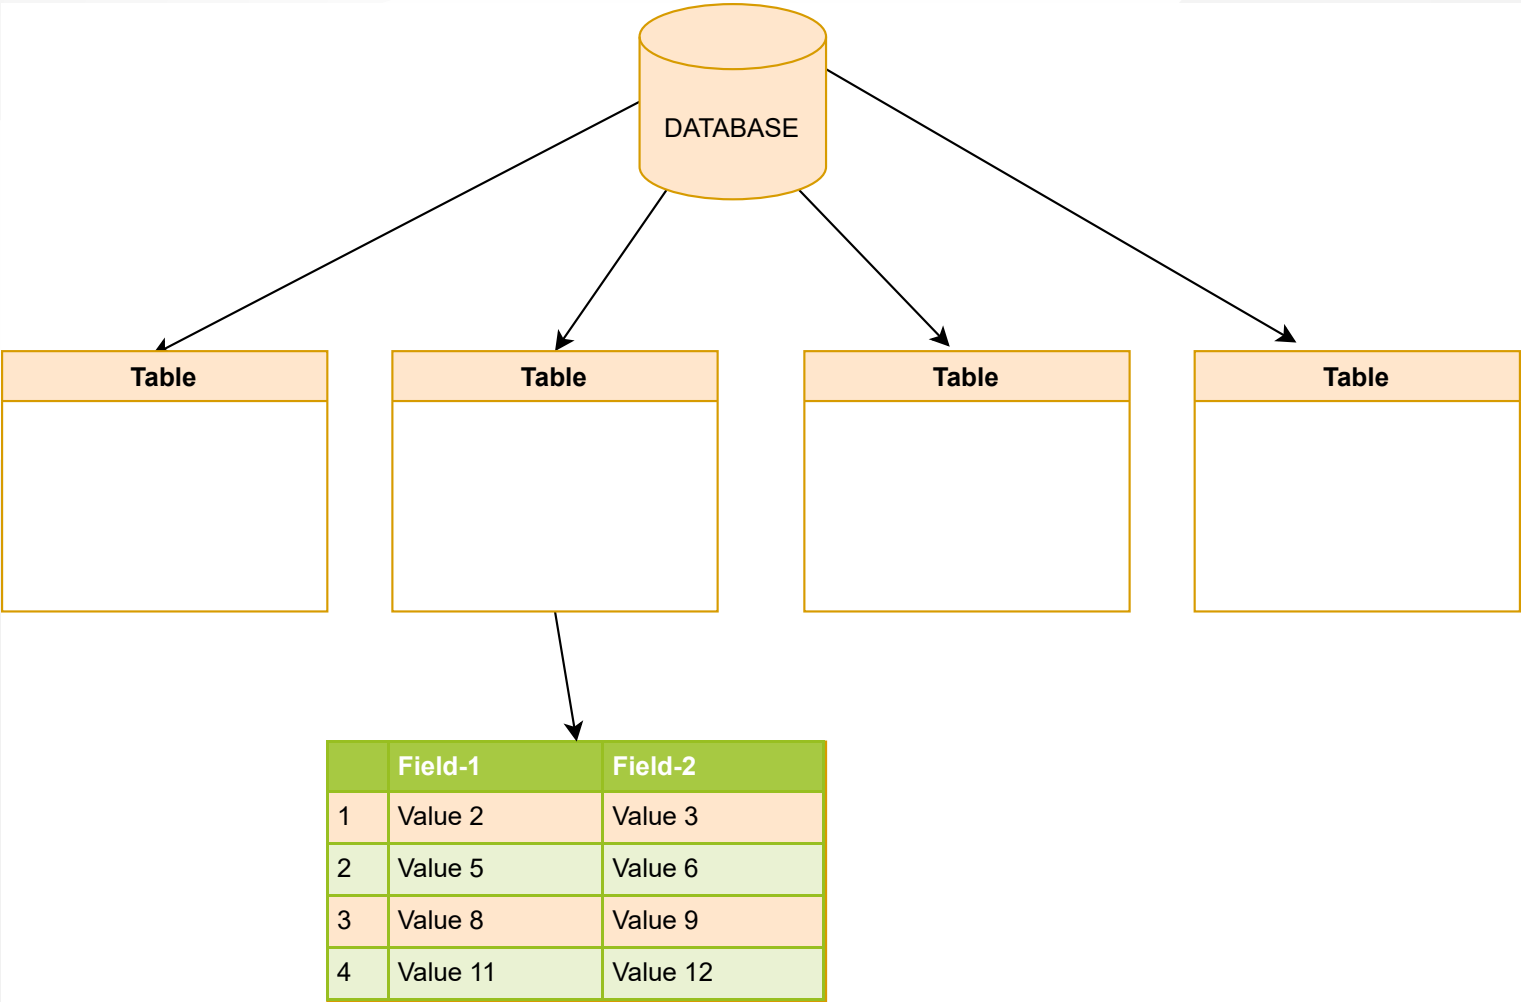

Table

- A database consists of data stored in tables.
- Tables are a group of data that is formed by arranging data in rows and columns.
- For example, 2 tables are created to store the course content and student information in the database:
 - Student information
 - contents

Table

- Each piece of information in the table is called a **record** , and the columns are called a **field** .
- For example, in the student information table, following information is included.
 - Student number,
 - Name and surname,
 - date of birth,
 - Place of birth,
 - E mail address

Table

Ogr_no	Ad_soyad	d_tarih	d_yeri	e-mail
1	Ayşe Öztürk	01.11.1979	Konya	ayse@gazi.edu.tr
2	Sema Özdemir	24.05.1975	Ankara	sema@gazi.edu.tr
3	Serdar Gülpınar	06.06.1983	Adana	serdar@gazi.edu.tr
4	Mehmet Efe	11.02.1978	Niğde	mehmet@gazi.edu.tr
5	Zerrin Polat	22.08.1980	Antalya	zerrin@gazi.edu.tr
6	Ulviye Kubalı	12.12.1984	İstanbul	ulviye@gazi.edu.tr

Table

Fields

Ogr_no	Ad_soyad	d_tarih	d_yeri	e-mail
--------	----------	---------	--------	--------

Record

1	Ayşe Öztürk	01.11.1979	Konya	ayse@gazi.edu.tr
2	Sema Özdemir	24.05.1975	Ankara	sema@gazi.edu.tr

Data Types

- In order to have information about the structure of the records kept in the database, some properties of the fields must be defined beforehand.
- *For example*, the personnel registration number must be made up of integers, names and surnames must be words.

MYSQL Data Types

- **Numeric**
- **Date and Time**
- **Textual (String)**
- **Spatial**

MYSQL Data Types

TINYINT :

- For very small integer values
- When Signed is defined, the values are between `-128` and `127` .
- Unsigned defined range is between `0` and `255` .

MYSQL Data Types

SMALLINT :

- For small integer values
- When Signed is defined, the values are between `-32768` and `32767`.
- Unsigned defined range is `0` to `65535` .

MYSQL Data Types

MEDIUMINT :

- For medium-sized integer values.
- When Signed is defined, the values are between `-8388608` and `8388607` .
- Unsigned defined range is between 0 and `16777215` .

MYSQL Data Types

INT(n):Integer

- For normal-sized integer values.
- When Signed is defined, the values are between `-2147483648` and `2147483647` .
- Unsigned defined range is between `0` and `4294967295` .

MYSQL Data Types

BIGINT :

- For large integer values.
- Can take integer value `-9223372036854775808` to `9223372036854775807`

MYSQL Data Types

FLOAT :

- Keeps numbers with their fractions.
- Max. character width is taken as a parameter. (up to 23 digits)

MYSQL Data Types

DOUBLE:

- Keeps numbers with their fractions.
- Max. character width is taken as a parameter. (24 to 53 digits)

MYSQL Data Types

DECIMAL:

- Keeps numbers with their fractions.
- The integer part can have a maximum 64 digits , and the fractional part a maximum 30 digits .

MYSQL Data Types

DATETIME:

- Datetime information in `Year+Month+Day+Hour+Minute+Second` format

```
YYYY-MM-DD HH:MM:SS
```

MYSQL Data Types

TIMESTAMP:

- Time information from January 1, 1970 to January 18, 2038 , in the format Year+Month+Day+Hour+Minute+Second .

YYYYMMDDHHMMSS

MYSQL Data Types

DATE:

- Date field that can change from 1000-01-01 to 9999-12-31 .

YYYY-MM-DD

MYSQL Data Types

CHAR(n):

- Fixed-length data with n characters.

MYSQL Data Types

TEXT:

- A text field that can hold up to 65535 characters.

MYSQL Data Types

MEDIUMTEXT:

- Text field up to 16777215 characters

MYSQL Data Types

VARCHAR(n):

- Characters of varying size, not exceeding n

MYSQL Data Types

BOOL:

- A data type that takes the value `0` or `1` . or `True/ False`

Key

- A key forces one or more fields to be entered as qualifiers for a row.
- There are 2 types of keys:
 - Primary Key
 - Foreign Key

Primary key

- It is the key data that will enable access to a record.
- For example, there are two Ahmet among the students. Each student must have a unique number in order to find the Ahmet we want while searching.
- For example student number could be a primary key
- Multiple fields can have primary keys together

Foreign key

- A foreign key is a set of attributes in a table that refers to the primary key of another table. The foreign key links these two tables.

Foreign key

Persons Table

PersonID	LastName	FirstName	Age
1	Hansen	Ola	30
2	Svendson	Tove	23
3	Pettersen	Kari	20

Foreign key

Orders Table

OrderID	OrderNumber	PersonID
1	77895	3
2	44678	3
3	22456	2
4	24562	1

Foreign key

- Notice that the "PersonID" column in the "Orders" table points to the "PersonID" column in the "Persons" table.
- The "PersonID" column in the "Persons" table is the **PRIMARY KEY** in the "Persons" table.
- The "PersonID" column in the "Orders" table is a **FOREIGN KEY** in the "Orders" table.
- The **FOREIGN KEY** constraint prevents invalid data from being inserted into the foreign key column, because it has to be one of the values contained in the parent table.

Database Design

- Objects are defined
 - **Library system:** books, members, types, loan movements

Designing a database

- A table is created for each object:
 - book,
 - members,
 - types,
 - woodc_movements

Designing a database

- A key field is selected for each table
 - **book table:** *book no*
 - **Members table:** *Userno*

Designing a database

- A column is added to the table for each property of the objects
 - **Book table:** book number, year, author, name, related field

Designing a database

- Additional tables are created for recurring object properties.
 - **request table:**

userno	request_date	Book_name	Book_date	Book_author	Related_field
.
.

Designing a database

- Fields that are not directly related to the table are determined.
 - The address of the member who borrowed the book in the loan transactions table is not directly related to this table.
 - This data should be included in the **members table** where member information is kept.

Designing a database

- Relationships between tables should be defined.
 - The relationship between the **fields** in a **table** is defined.
 - For example, the **userno** field in the **members table** should be associated with the **userno** field in the **request table**.

Resources

- Köseoğlu, K. (2005). Veri Tabanı Mantığı. Şefik Matbaası. İstanbul
- Alokoç Burma, Z. (2005). Veritabanı Yönetim Sistemleri ve SQL / PL - SQL / T – SQL. Seçkin Yayıncılık. Ankara

End – Of – Week – 1 – Module